

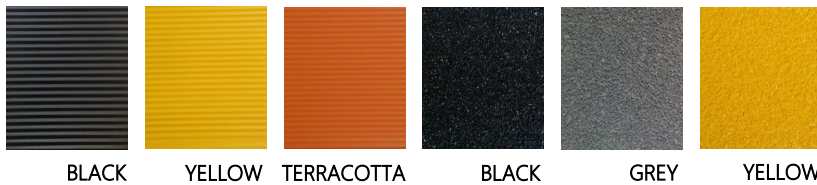


GUARDIAN BULLNOSE STAIR NOSING - TECHNICAL DATA SHEET

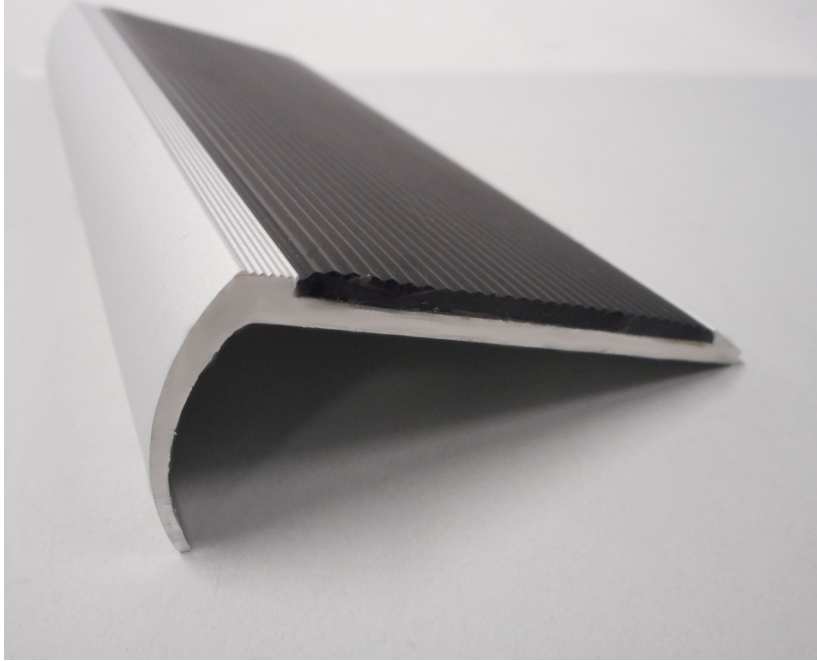

PROFILE

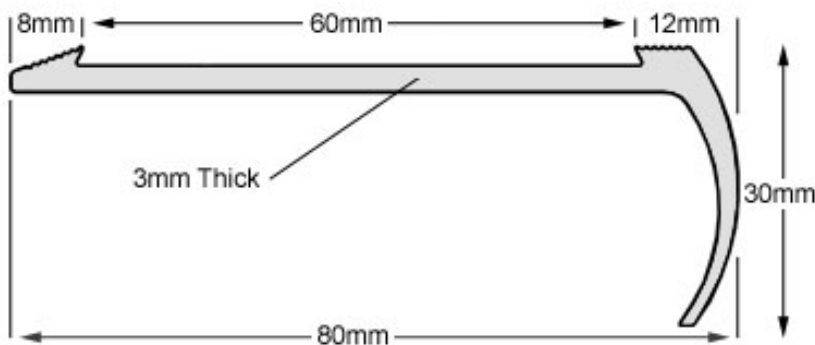

APPLICATION

The Guardian Bullnose Stair Nosing can be installed both internal and external for new and existing applications.

SUITABLE FOR:

Most substrates, stone, tiles, timber, terrazzo, concrete, pavers, brick, vinyl and carpet.

BENEFITS

Pre-cut and pre-drilled for easy installation

Waterproof and weatherproof

Bevelled edge for existing applications

Designed to meet AS1428:2009 for luminance and AS4586:2004 for slip resistance

SPECIFICATION

| | |
|-----------------|-------------------------------|
| Length | Up to 5800mm in one piece |
| Thickness | 3mm |
| Profile | 80mm x 30mm |
| Turndown | 90 degree angle |
| Aluminium | Natural Anodised |
| Inserts | Silicon Carbide, Polyurethane |
| Insert Colours | |
| Silicon Carbide | Black, Grey, Yellow |
| Polyurethane | Black, Yellow, Terracotta |
| Slip Rating | R13 |
| Setting | Internal / External |

